

## **P34AL SERIES TUBE-ICE MACHINE**

50 Ton per Day Ammonia Low-Side




The P34AL Series with a capacity of 50 tons of ice per day is an ammonia low-side Tube-Ice machine designed to operate with a dedicated ammonia high-side or on a central refrigeration system. The P34AL will provide you with many years of dependable service.

Heavy-duty industrial construction, automatic operation, energy efficiency and the best warranty in the business make Vogt Tube-Ice machines the only "clear" choice for your ice making needs.

## **P34AL Standard Features:**

- 25 Year Evaporator Warranty
- Up to 50 tons of ice per day
- Voltage 230v.,3p.,60hz.
- Control Voltage 230v.,1p.,60hz
- UL 508A Industrial Control Panel
- Ammonia flooded operation
- Manufactured in accordance with A.S.M.E. code
- T Standard ice length 1"

### P34AL Tube-Ice Available in Three Ice Sizes:

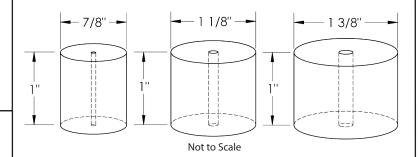

## **Operating Conditions**

The ice machine shall not be subjected to an atmospheric temperature lower than 50  $^{\circ}$  F. (10  $^{\circ}$  C.) nor higher than 90  $^{\circ}$  F. (32  $^{\circ}$  C.) without effect on performance. Water for condensing or ice making purposes shall be non-corrosive.

The water shall be at a constant pressure no less than 30lbs. at the ice machine location. The condition of the water to make satisfactory ice shall be the responsibility of the purchaser.

## **P34AL Options:**

- ¥ Voltage -460 v.,3p.,60hz.
- **¥** Voltage 400v.,3p.,50hz.
- ¥ Voltage 575v.,3p.,60hz.
- **¥** 120v Controls
- **▼** PLC Control panel (programmable logic controller)
- **¥** Power monitor
- **★** Cutter for 1-1/2" long ice
- **★** Cutter for crushed ice
- **★** Cutterless option
- \* R.S. control valves
- **¥** Liquid overfeed
- **¥** All stainless steel
- ★ "CE" Approval (400v, 50hz only)
- **★** Canadian Registration Number (CRN)

#### Vogt Ice LLC

1000 W. Ormsby Avenue Louisville, KY 40210 (800) 853-8648, (502) 635-3000 info@vogtice.com















# **P34AL SERIES TUBE-ICE MACHINE**

50 Ton per Day Ammonia Low-Side

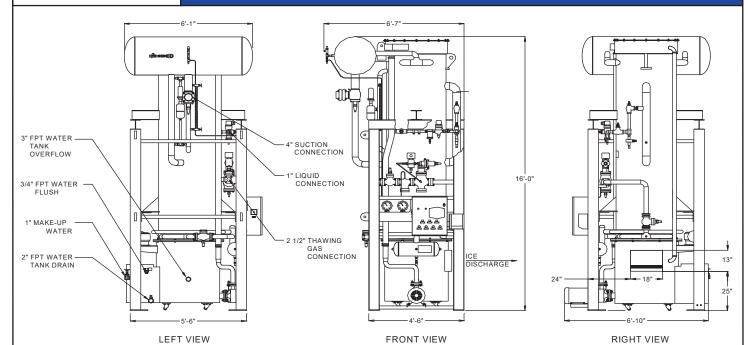

Water	P34AL STANDARD CAPACITY TONS OF ICE PER 24 HOURS @ 10 <sup>0</sup> F SUCTION						
Temperature	7/8" Diameter Ice	1-1/8" Diameter Ice	1-3/8" Diameter Ice				
80 ° F	60.6	57.2	43.9				
70 ° F	62.9	59.7	45.9				
60 ° F	65.3	62.4	48.1				
50 ° F	67.9	65.4	50.6				
Shipping Weight	10,400	10,000	9,600				
Operating Weight	11670	11,670	11,270				

CAPACITY TABLE, TONS OF ICE PER 24 HOURS (AT SUCTION TEMPERATURE <sup>0</sup> F)													
Water	0 ° F			5 ° F		15 <sup>0</sup> F		20 ° F					
Temperature	7/8"	1-1/8"	1-3/8"	7/8"	1-1/8"	1-3/8"	7/8"	1-1/8"	1-3/8"	7/8"	1-1/8"	1-3/8"	
80 ° F	76.7	75.1	58.5	69.2	66.5	51.5	50.8	46.9	35.7	39.6	35.6	26.8	
70 ° F	79.2	78.0	61.0	71.6	69.3	53.7	52.9	49.1	37.4	41.3	37.3	28.1	
60 ° F	81.9	81.3	63.8	74.1	72.3	56.3	55.1	51.4	39.3	43.1	39.2	29.6	
50 ° F	84.7	84.8	66.8	76.9	75.6	59.0	57.4	54.0	41.4	45.1	41.3	31.3	



## Capacities based on the following:

- -Flooded ammonia liquid feed
- -Blowdown of 40 gallons per cycle
- -Ammonia discharge pressure of 185psig
- -Harvest cycle of 3.5 minutes

P34AL Cutterless

Revision 7/2023