

P24A/F SERIES TUBE-ICE MACHINE Self Contained P24A (Ammonia), P24F (R404a)




The P24 Series with a capacity of 25 tons of ice per day is the preferred ice machine for thousands of packaged ice factories worldwide. Available as a self contained water cooled machine for operation with ammonia or R404a refrigerant, the P24A/F will provide you with many years of dependable service.

Heavy-duty industrial construction, automatic operation, energy efficiency and the best warranty in the business make the Vogt P24A/F Series the only "clear" choice for your ice making needs.

P24A/F Standard Features:

- ★ Self Contained Packaged Unit
- ★ Factory Tested and Certified
- ★ 25 Year Evaporator Warranty
- ¥ Voltage 460v.,3p.,60hz.
- * Control Voltage 230v., 1p., 60hz
- ¥ UL 508A Industrial Control Panel
- Compressor Soft Start
- * R404a or Ammonia Refrigerant
- * Mycom Compressor Standard on P24A
- * Carlyle Compressor Standard on P24F
- * Water-Cooled Condenser
- * R404a refrigerant charge included in P24F (except CE units)
- * Stainless Steel Condenser Tubes

P24A/F Tube-Ice Available in Three Ice Sizes:

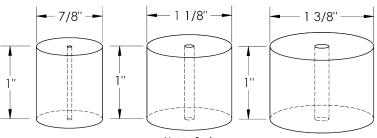

Not to Scale

Operating Conditions

The ice machine shall not be subjected to an atmospheric temperature lower than 50 $^{\circ}$ F. (10 $^{\circ}$ C.) nor higher than 90 $^{\circ}$ F. (32 $^{\circ}$ C.) without effect on performance. Water for condensing or ice making purposes shall be non-corrosive.

The water shall be at a constant pressure no less than 30lbs. at the ice machine location. The condition of the water to make satisfactory ice shall be the responsibility of the purchaser.

P24A/F Options:

- ¥ Voltage 230v.,3p.,60hz.
- ✗ Voltage 400v.,3p.,50hz.
- ¥ Voltage 200v.,3p.,50hz.
- ▼ Voltage 575v.,3p.,60hz.
- * PLC Control panel (programmable logic controller)
- ✗ Cutter for 1-1/2" long ice
- * Cutter for crushed ice
- Vilter compressor
- * Power monitor
- ★ Canadian Registration Number (CRN)

Vogt Ice LLC 1000 W. Ormsby Avenue Louisville, KY 40210 (800) 853-8648, (502) 635-3000 info@vogtice.com










P24A/F SERIES TUBE-ICE MACHINE

Self Contained P24A (Ammonia), P24F (R404a)

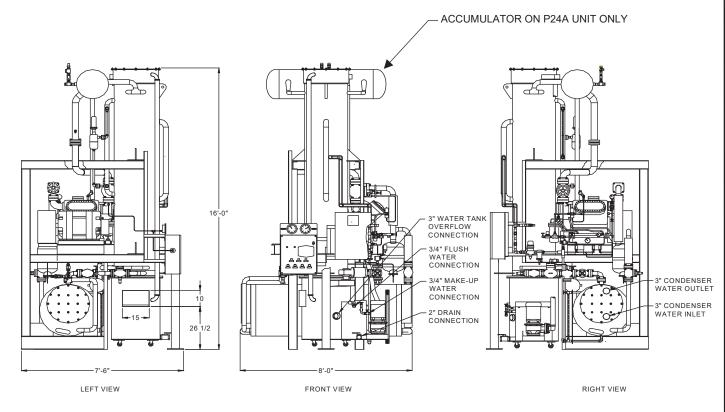

STANDARD CAPACITY, TONS PER 24 HOURS									
Water	MODEL P24A (Ammonia Refrigerant)			MODEL P24F (R404a Refrigerant)					
Temperature	7/8" DIA. ICE	1-1/8" DIA. ICE	1-3/8" DIA.ICE	7/8" DIA. ICE	1-1/8" DIA. ICE	1-3/8" DIA.ICE			
80 ⁰ F	20.5	21.5	20.0	21.7	22.6	21.9			
70 ⁰ F	21.5	22.6	21.0	22.8	23.8	23.1			
60 ⁰ F	22.6	23.9	22.2	24.0	25.1	24.3			
50 ⁰ F	23.8	25.3	23.4	25.3	26.5	25.7			
Shipping Weight	12,200	12,000	11,800	13,200	13,000	12,800			
Operating Weight	13,760	13,560	13,360	13,560	13,360	13,160			



Model	Ice Machine THR (btu/hr)	Press Drop thru Condenser* (PSIG)	Water Deald	Water to Tower (⁰ F)	Water from Tower (⁰ F)				
P24A	981,000	31,000 14		95	85				
P24F	1,031,000	1,031,000 15		95	85				
*Pressure drop through condenser does not include water regulator.									

Capacity rating is average for the model. Individual machines may vary +/- 5%.

Capacity based on ambient (air) temperature of 90 ° F. (32 ° C.).

Makeup water usage includes 20% blowdown.